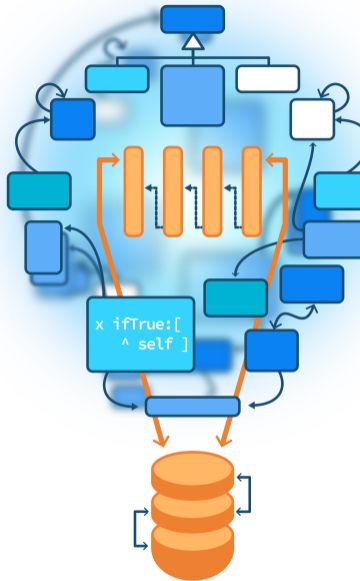# Stone Paper Scissors

The case of results

S.Ducasse, L. Fabresse, G. Polito, and P. Tesone
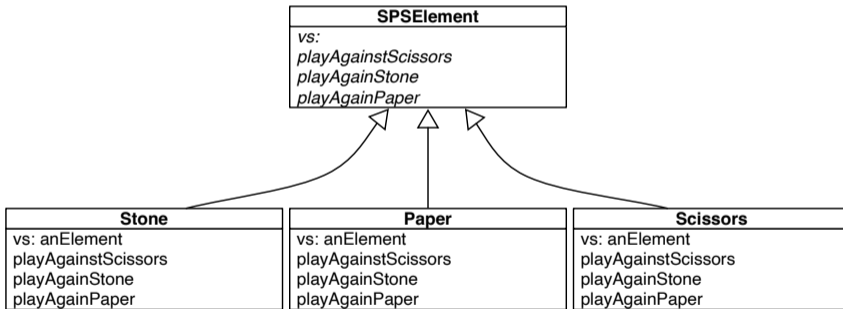

Pharo

Goals

- Think about results
- What to do with them

Remember

```
> Stone new vs: Paper new
#paper
```


SPSElement
vs:
playAgainstScissors
playAgainStone
playAgainPaper

Stone	Paper	Scissors
vs: anElement	vs: anElement	vs: anElement
playAgainstScissors	playAgainstScissors	playAgainstScissors
playAgainStone	playAgainStone	playAgainStone
playAgainPaper	playAgainPaper	playAgainPaper

What should we return?

- What symbols, numbers?
- Consequences?

Returning numbers

StonePaperScissorsTest >> testPaperIsWinning
  self assert: (Stone new vs: Paper new) equals: −1

StonePaperScissorsTest >> testStoneAgainsStone
  self assert: (Stone new vs: Stone new) equals: 0

StonePaperScissorsTest >> testStoneIsWinning
  self assert: (Stone new vs: Scissors new) equals: 1

Returning number analysis

- We have to know the message sent to know how to interpret the number

```
> Stone new vs: Paper new
-1

> Paper new vs: Stone new
1
```

- Here paper is winning but it got different results!

Returning symbols analysis

```
> Stone new vs: Paper new
#paper

> Paper new vs: Stone new
#paper
```

- With symbols we know who won
- We will have to compare to do something

```
(aPlayer vs: anotherPlay) = #draw
  ifTrue: [ ... ]
```

Alternate solution

```
Paper new vs: Paper new
  onDraw: [ Game incrementDraw ]
  onReceiverWin: [ ]
  onReceiverLose: [ ]
```

```
Paper >> playAgainstStone: aStone
  onDraw: aDrawerBlock
  onReceiverWin: aWinnerBlock
  onReceiverLose: aLoserBlock

  ^ aWinnerBlock value
```

It feels that there are too many parameters.

Simply with objects

Paper new vs: Paper new withResultHandler: ResultHandler new

Paper >> playAgainstStone: aStone withResultHandler: aResultHandler
  ^ aResultHandler paperWon

- It feels like the "Do not ask tell"
- We can have different result handlers
- Feel free to experiment to see how it goes

Stepping back

- Symbols look better than numbers for returning information for this case but there are numerous cases where a number is definitively better
- Creating result handlers can be heavy
- Context and scenarios often give you information to see
  - where to invest
  - what is worth to support reuse

Conclusion

A design solution is often dependent on a context

- Try alternate solutions, compare them
- Exercise your design taste

Advanced Object-Oriented Design and Development with Pharo

A course by
S.Ducasse, L. Fabresse, G. Polito, and P. Tesone

2023