



Inheritance Semantics and Method Lookup

Stéphane Ducasse
 stephane.ducasse@inria.fr
<http://stephane.ducasse.free.fr/>

Goal

Inheritance
 Method lookup
 Self/super difference




Inheritance

Do not want to rewrite everything!
 Often we want small changes
 We would like to reuse and extend existing behavior

Solution: class inheritance

Each class defines or refines the definition of its ancestors



Inheritance

New classes

Can add state and behavior:
 color, borderColor, borderWidth,
 totalArea

Can specialize ancestor behavior
 intersect:

Can use ancestor's behavior and state
 Can redefine ancestor's behavior
 area to return totalArea



Inheritance in Smalltalk

Single inheritance

Static for the instance variables

At class creation time the instance variables are collected from the superclasses and the class. No repetition of instance variables.

Dynamic for the methods

Late binding (all virtual) methods are looked up at run-time depending on the dynamic type of the receiver.



Message Sending

receiver selector args

Sending a message = looking up the method that should be executed and executing it

Looking up a method: When a message (receiver selector args) is sent, the method corresponding to the message selector is looked up through the inheritance chain.



Method Lookup

Two steps process




1: The lookup starts in the **CLASS** of the **RECEIVER**.

2: If the method is defined in the method dictionary, it is returned.


Otherwise the search continues in the superclasses of the receiver's class. If no method is found and there is no superclass to explore (class Object), this is an **ERROR**



Lookup: class and inheritance

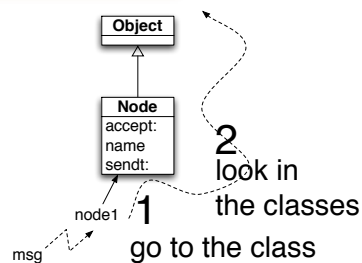


Some Cases

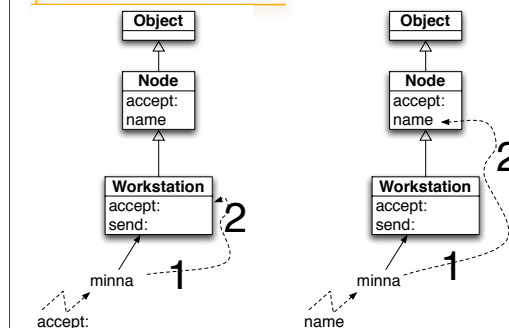

Method Lookup starts in Receiver Class

- A new foo
- B new foo
- A new bar
- B new bar



S.Ducasse




10

Method Lookup starts in Receiver Class

- aB foo
- (1) aB class => B
 - (2) Is foo defined in B?
 - (3) Foo is executed -> 50

- aB bar
- (1) aB class => B
 - (2) Is bar defined in B?
 - (3) Is bar defined in A?
 - (4) bar executed
 - (5) Self class => B
 - (6) Is foo defined in B?
 - (7) Foo is executed -> 50




S.Ducasse



11

self **always** represents the receiver

- A new foo
- >
- B new foo
- >
- C new foo
- >
- A new bar
- >
- B new bar
- >
- C new bar




S.Ducasse

12

self **always** represents the receiver

- A new foo
- > 10
- B new foo
- > 10
- C new foo
- > 50
- A new bar
- > 10
- B new bar
- > 10
- C new bar



S.Ducasse

13

When message is not found


- If no method is found and there is no superclass to explore (class Object), a new method called #doesNotUnderstand: is sent to the receiver, with a representation of the initial message.



S.Ducasse

14

Graphically...



S.Ducasse

15

...in Smalltalk


- node1 print: aPacket
 - node is an instance of Node
 - print: is looked up in the class Node
 - print: is not defined in Node > lookup continues in Object
 - print: is not defined in Object => lookup stops + exception
 - message: node1 doesNotUnderstand: #(#print aPacket) is executed
- node1 is an instance of Node so doesNotUnderstand: is looked up in the class Node
 - doesNotUnderstand: is not defined in Node => lookup continues in Object
 - doesNotUnderstand: is defined in Object => lookup stops + method executed (open a dialog box)



S.Ducasse

16

Graphically...

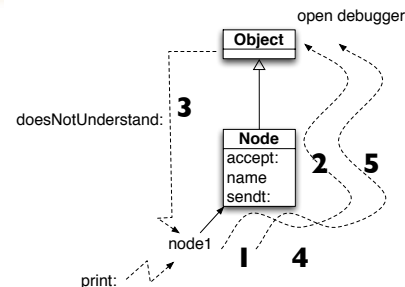

S.Ducasse

17

Roadmap

- Inheritance
- Method lookup
- Self/super difference**



S.Ducasse

18



18

How to Invoke Overridden Methods?

- Solution: Send messages to super
- When a packet is not addressed to a workstation, we just want to pass the packet to the next node, i.e., we want to perform the default behavior defined by Node.

```
Workstation>>accept: aPacket
(aPacket isAddressedTo: self)
ifTrue:[Transcript show: 'Packet accepted by the Workstation ',
self name asString]
ifFalse: [super accept: aPacket]
```

- Design Hint: Do not send messages to super with different selectors than the original one. It introduces implicit dependency between methods with different names.

S.Ducasse



The semantics of super


- Like self, **super** is a pseudo-variable that refers to the **receiver** of the message.
- It is used to invoke overridden methods.
- When using self, the lookup of the method begins in the class of the receiver.
- When using super, the lookup of the method begins in the **superclass of the class of the method containing the super expression**

S.Ducasse



super changes lookup starting class

- A new foo
- A new bar
- B new foo
- B new bar
- C new foo
- C new bar




S.Ducasse



super changes lookup starting class

- A new bar
- -> 10
- B new bar
- -> 10 + 10
- C new bar
- -> 50 + 50




S.Ducasse



super is NOT the superclass of the receiver

Suppose the **WRONG** hypothesis: "The semantics of super is to start the lookup of a method in the superclass of the receiver class"




S.Ducasse

23

super is NOT the superclass of the receiver

mac is instance of ColoredWorkStation
Lookup starts in ColoredWorkStation
Not found so goes up...

accept: is defined in Workstation
lookup stops
method accept: is executed
Workstation>>accept: does a super send
Our hypothesis: start in the super of the class of the receiver
=> superclass of class of a ColoredWorkstation is ... **Workstation !**



S.Ducasse

24

What you should know

- Inheritance of instance variables is made at class definition time.
- Inheritance of behavior is dynamic.
- self ****always**** represents the receiver.
- Method lookup starts in the class of the receiver.
- **super** represents the **receiver** but method lookup starts in the superclass of the class **using** it.
- **Self is dynamic vs. super is static.**

S.Ducasse

25