# Metaclasses in 7 Steps

Classes are objects too...

Classes are instances of other classes

...

One model applied twice

Metaclasses in 7 points

1. Every object is an instance of a class
2. Every class eventually inherits from Object
3. Every class is an instance of a metaclass
4. The metaclass hierarchy parallels the class hierarchy
5. Every metaclass inherits from Class and Behavior
6. Every metaclass is an instance of Metaclass
7. The metaclass of Metaclass is an instance of Metaclass

Adapted from Goldberg & Robson, *Smalltalk-80 — The Language*
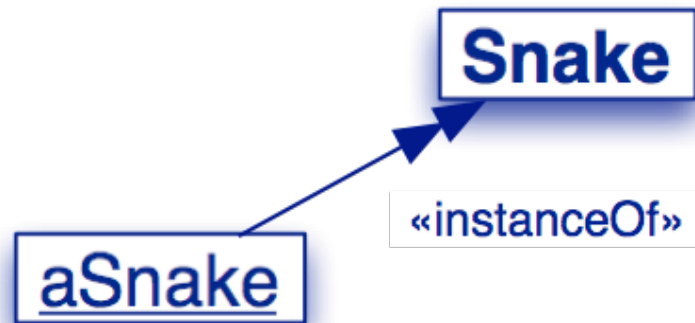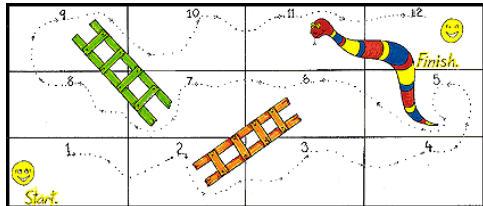
RMod

Metaclasses in 7 points

1. **Every object is an instance of a class**
2. Every class eventually inherits from Object
3. Every class is an instance of a metaclass
4. The metaclass hierarchy parallels the class hierarchy
5. Every metaclass inherits from Class and Behavior
6. Every metaclass is an instance of Metaclass
7. The metaclass of Metaclass is an instance of Metaclass

RMod

1. Every object is an instance of a class

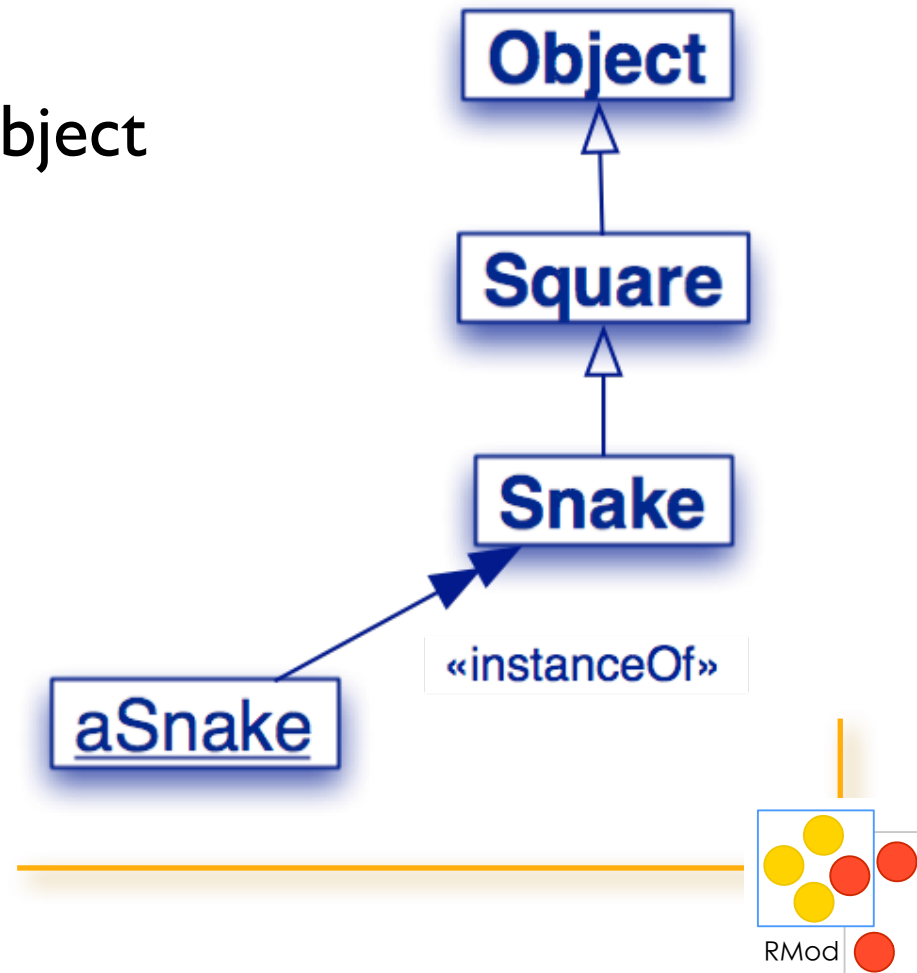**Snake**

«instanceOf»

aSnake

RMod

Metaclasses in 7 points

1. Every object is an instance of a class
2. **Every class eventually inherits from Object**
3. Every class is an instance of a metaclass
4. The metaclass hierarchy parallels the class hierarchy
5. Every metaclass inherits from Class and Behavior
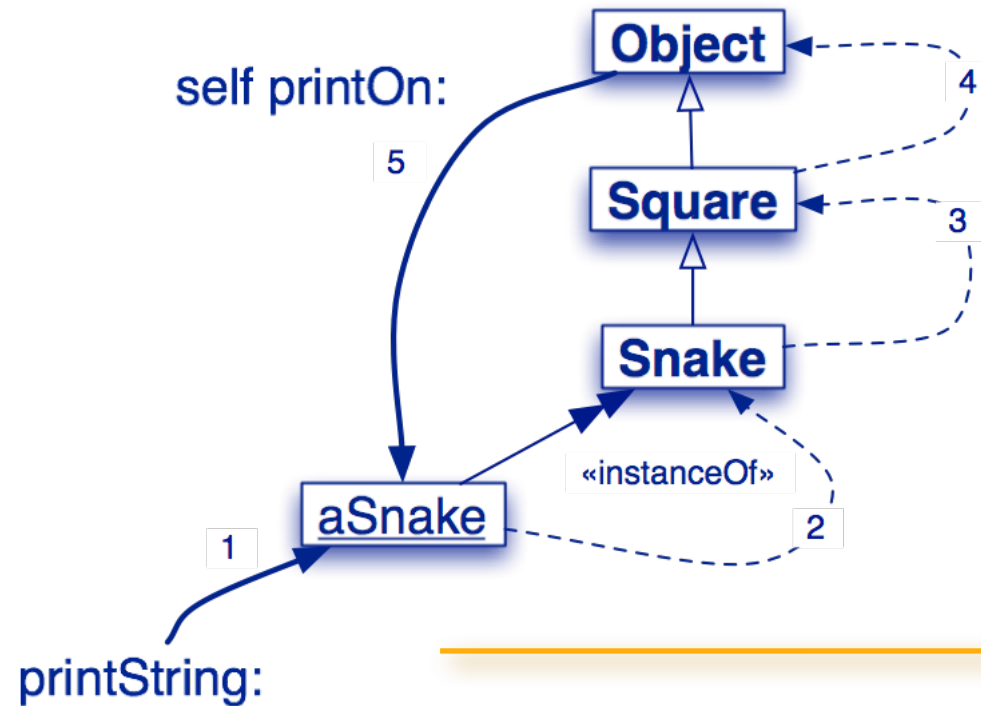6. Every metaclass is an instance of Metaclass

RMod

2. Every class inherits from Object

Every object is-an Object
The class of every object
ultimately inherits from Object

Object

Square

Snake

«instanceOf»

aSnake

RMod

The Meaning of is-a

When an object receives a message, the method is looked up in the method dictionary of its class, and, if necessary, its superclasses, up to Object

Responsibilities of Object

**`Object`**

represents the common object behavior

error-handling, halting …

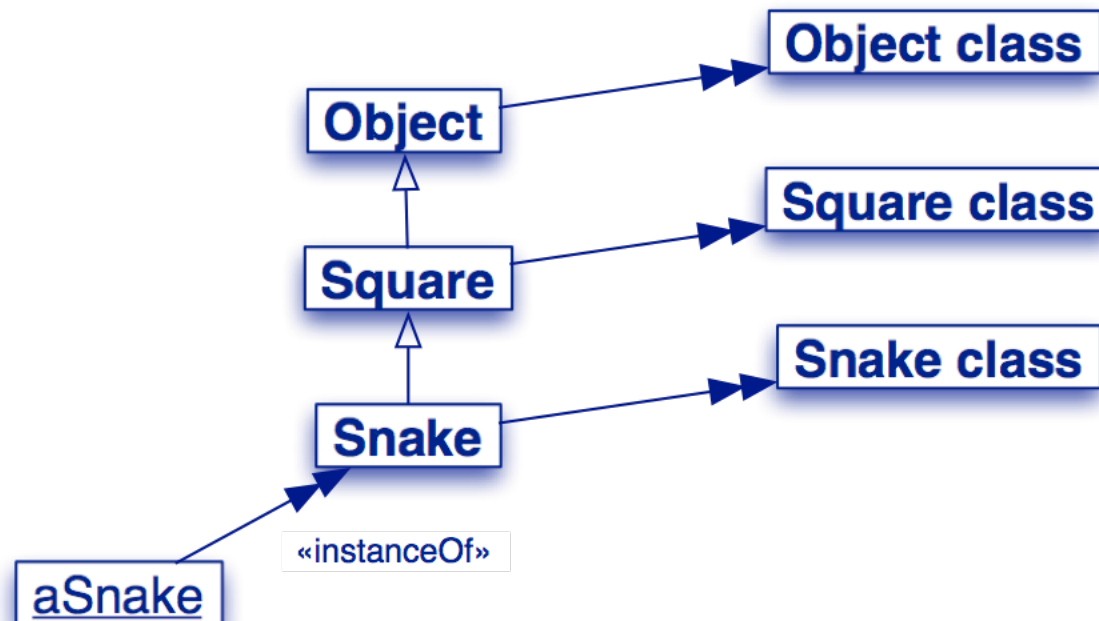all classes should inherit ultimately from `Object`

Metaclasses in 7 points

1. Every object is an instance of a class
2. Every class eventually inherits from Object
3. **Every class is an instance of a metaclass**
4. The metaclass hierarchy parallels the class hierarchy
5. Every metaclass inherits from Class and Behavior
6. Every metaclass is an instance of Metaclass
7. The metaclass of Metaclass is an instance of

3. Every class is an instance of a metaclass

Classes are objects too!

Every class X is the unique instance of its metaclass, called X class

Metaclasses are implicit

There are no explicit metaclasses
- Metaclasses are created implicitly when classes are created
- No sharing of metaclasses (unique metaclass per class)

RMod

Metaclasses by Example

Square allSubclasses
Snake allSubclasses

Snake allInstances
Snake instVarNames

Snake back: 5

Snake selectors

Snake canUnderstand: #new

RMod

Metaclasses in 7 points

1. Every object is an instance of a class
2. Every class eventually inherits from Object
3. Every class is an instance of a metaclass
4. **The metaclass hierarchy parallels the class hierarchy**
5. Every metaclass inherits from Class and Behavior
6. Every metaclass is an instance of Metaclass
7. The metaclass of Metaclass is an instance of

RMod

4. The metaclass hierarchy parallels the

RMod

Uniformity between Classes and Objects

Classes are objects too, so …

Everything that holds for objects holds for classes as well

Same method lookup strategy

Look up in the method dictionary of the metaclass

About the Buttons
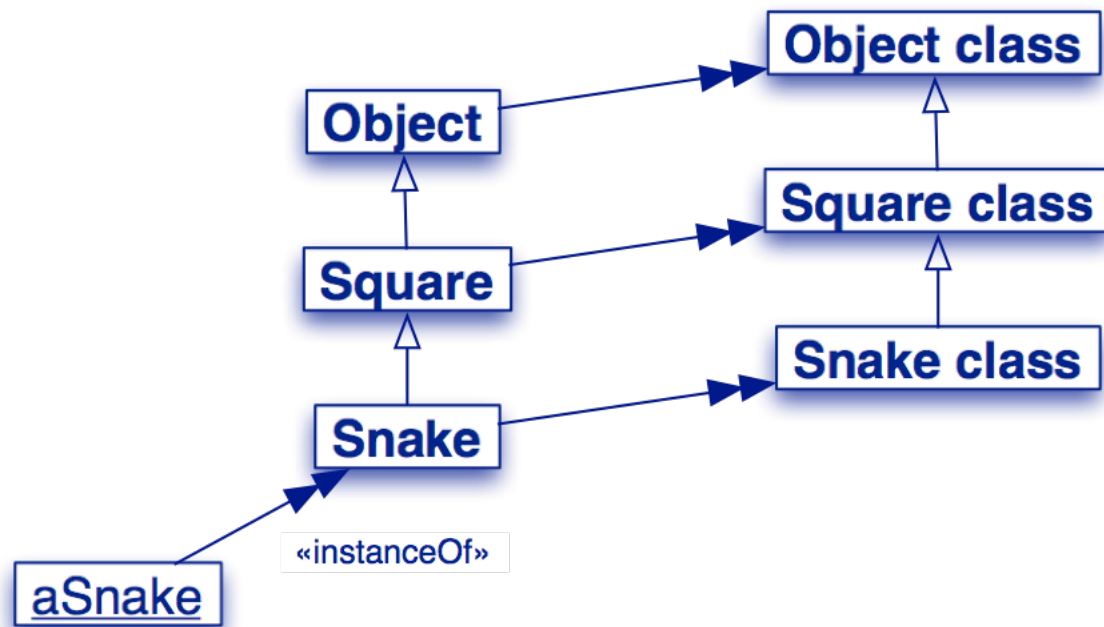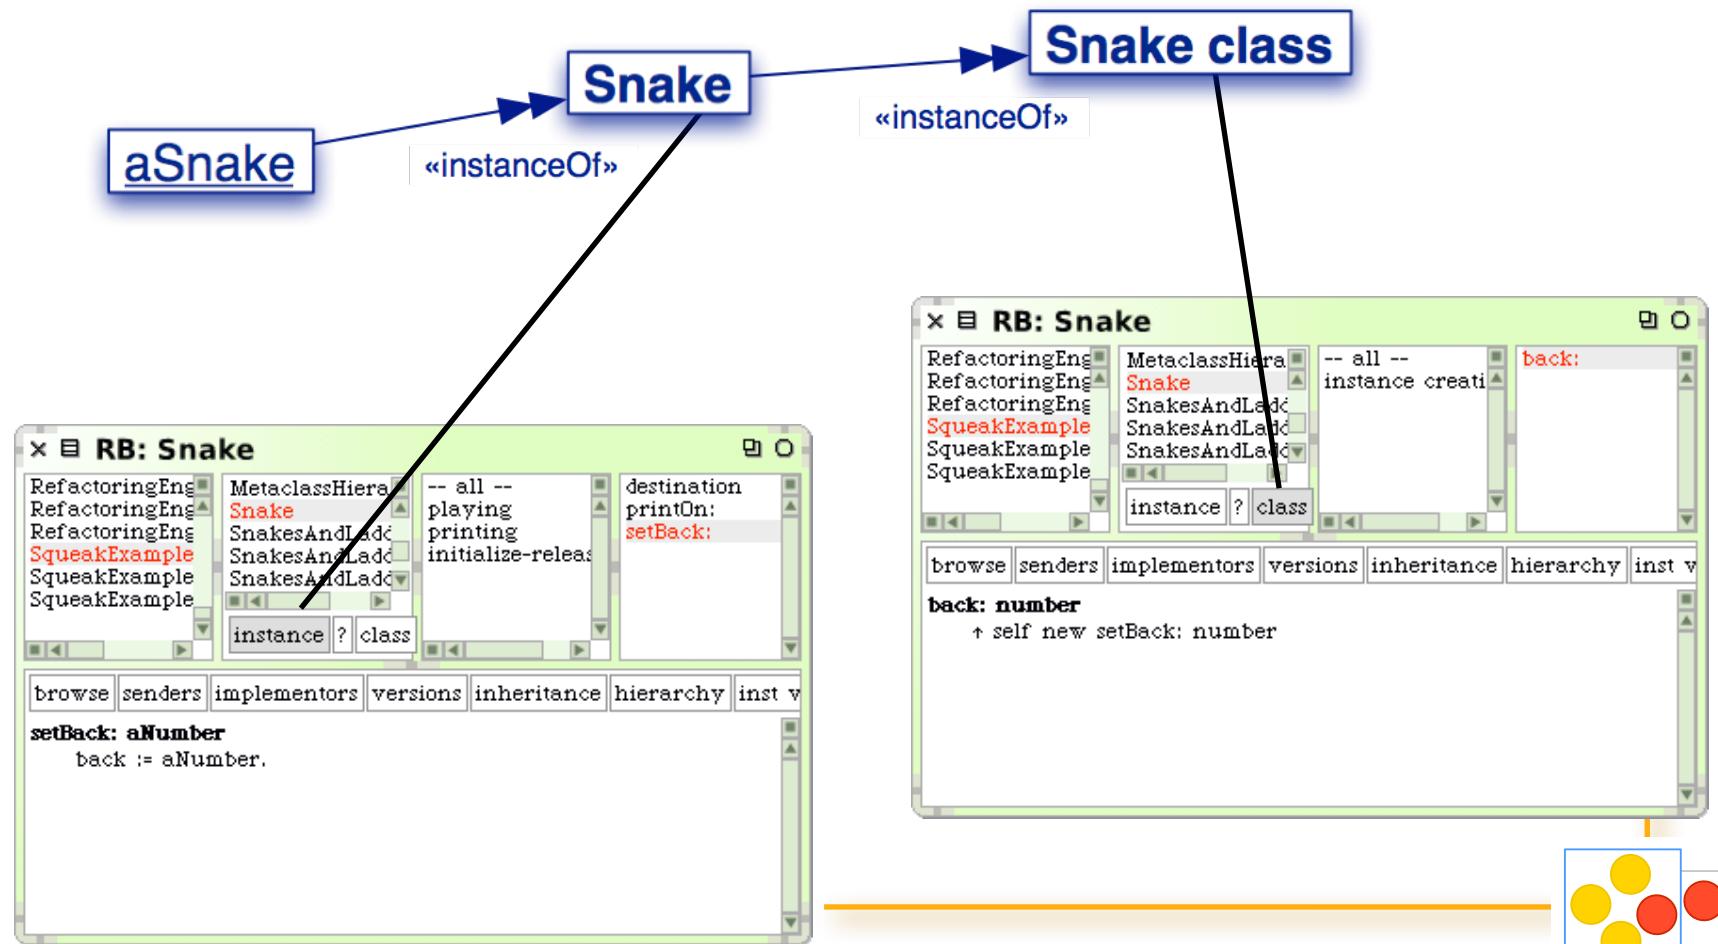
Metaclasses in 7 points

1. Every object is an instance of a class
2. Every class eventually inherits from Object
3. Every class is an instance of a metaclass
4. The metaclass hierarchy parallels the class hierarchy
5. **Every metaclass inherits from Class and Behavior**
6. Every metaclass is an instance of Metaclass
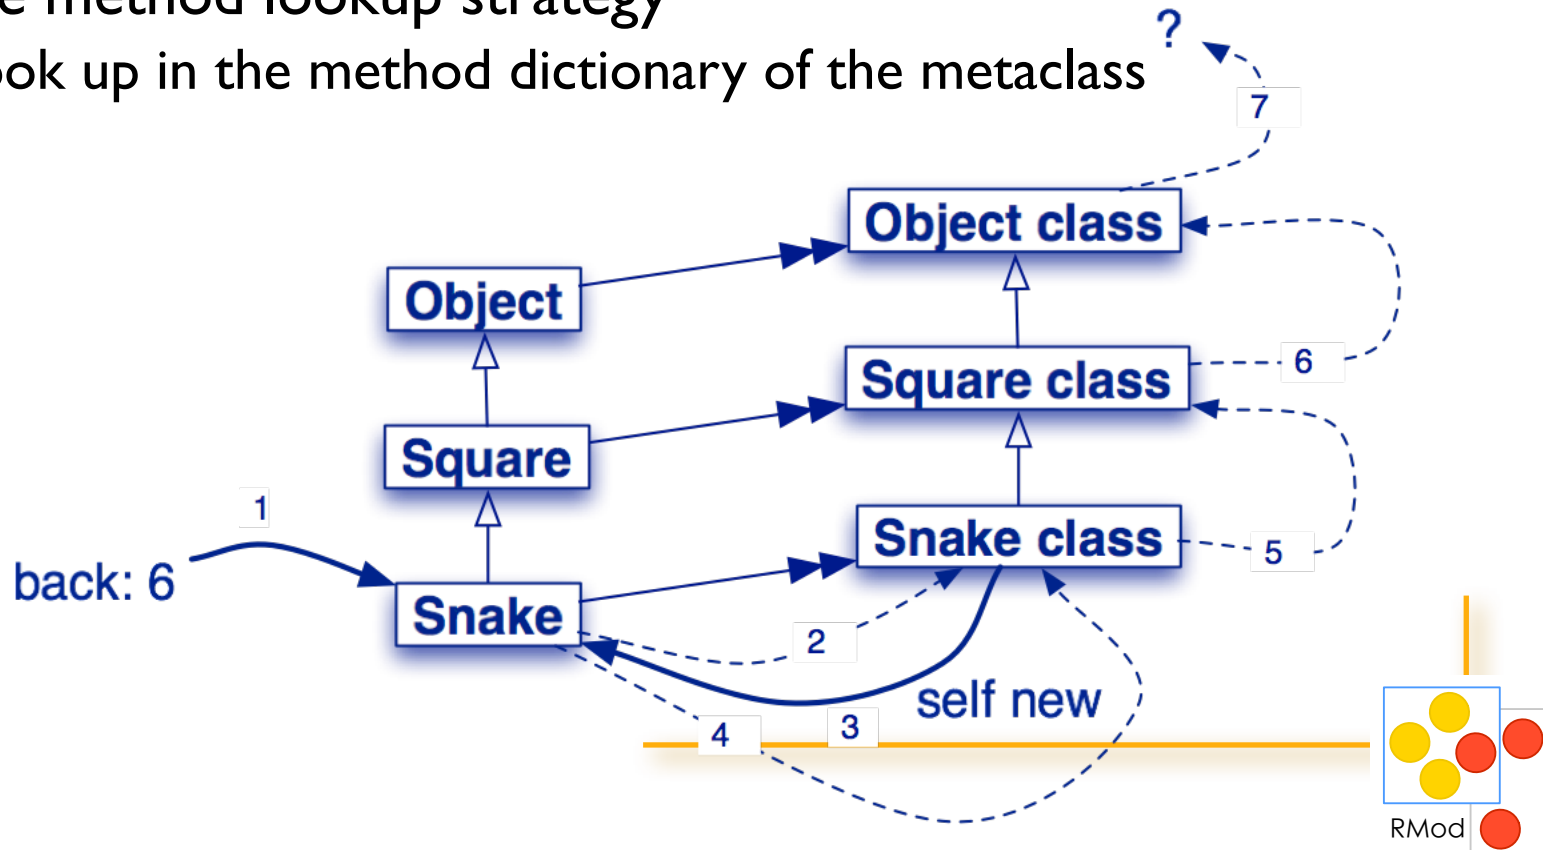7. The metaclass of Metaclass is an instance of

RMod

5. Every metaclass inherits from Class and

Every class is-a Class = The metaclass of every class inherits from Class

Behaviour

ClassDescription

Class

Object

Square

Snake

Object class

Square class

Snake class

«instanceOf»

aSnake

RMod
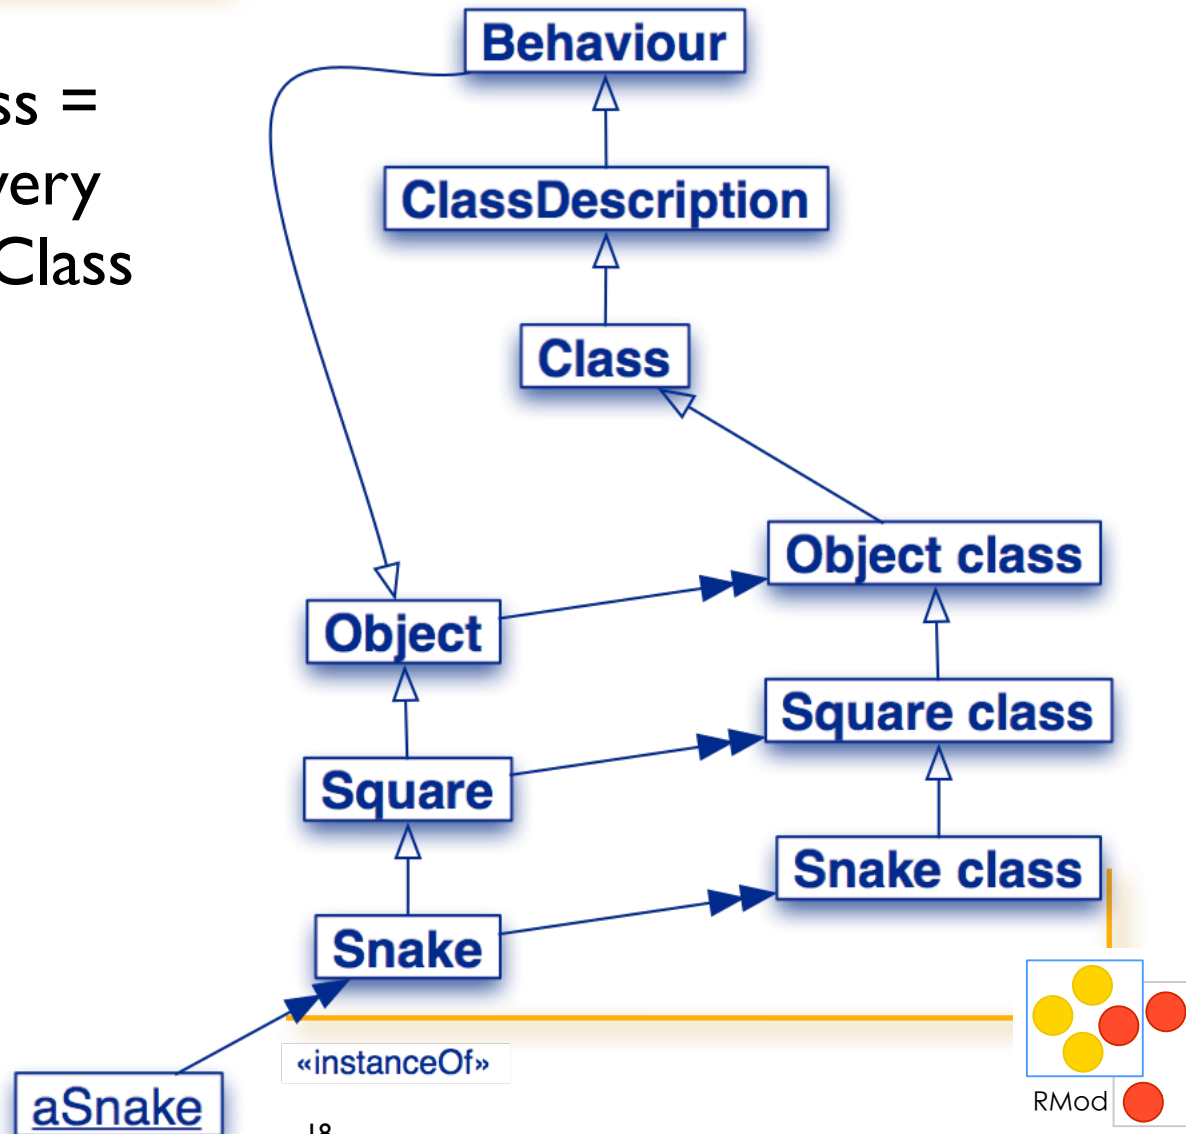
Where is new defined?

Responsibilities of Behavior

`Behavior`

Minimum state necessary for objects that have instances.

Basic interface to the compiler.

State:

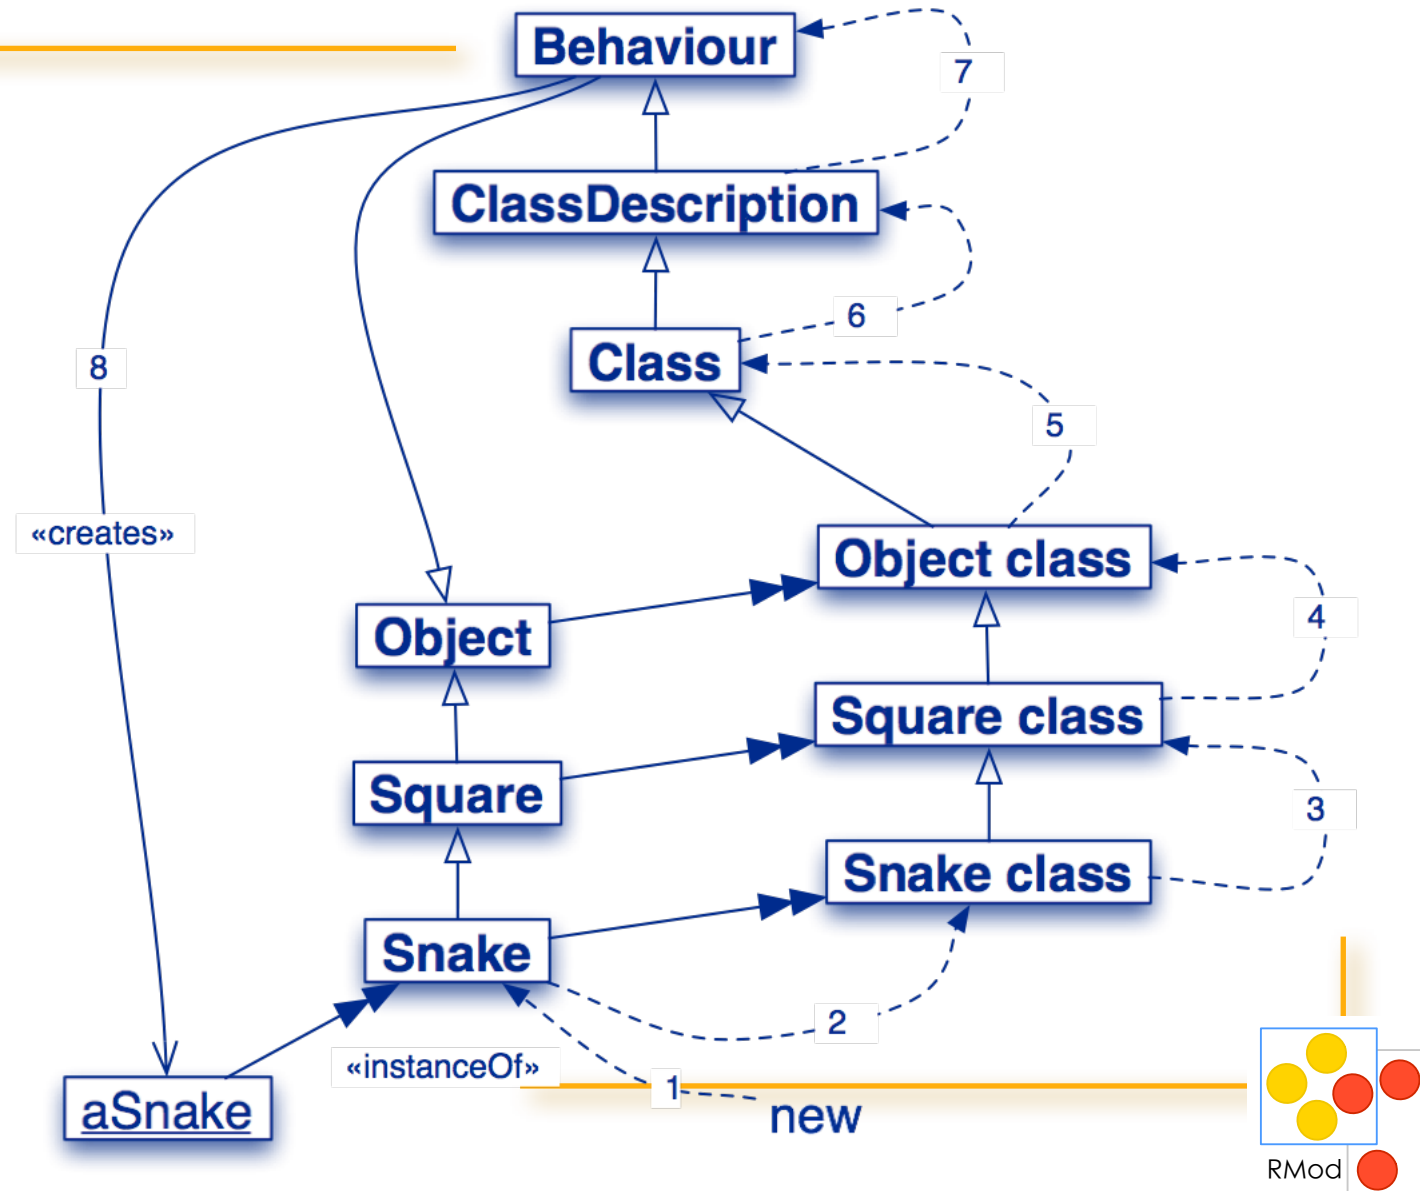class hierarchy link, method dictionary, description of instances (representation and number)

Methods:

creating a method dictionary, compiling method

instance creation (new, basicNew, new:, basicNew:)

class hierarchy manipulation (superclass:, addSubclass:)

accessing (selectors, allSelectors, compiledMethodAt:)

accessing instances and variables (allInstances, instVarNames)

RMod

Responsibilities of ClassDescription

`ClassDescription`

adds a number of facilities to basic Behavior:

named instance variables

category organization for methods

the notion of a name (abstract)

maintenance of Change sets and logging changes

most of the mechanisms needed for fileOut

`ClassDescription` is an abstract class: its facilities
are intended for inheritance by the two subclasses,
`Class` and `Metaclass`.

RMod

Responsibilities of Class

`Class`

represents the common behavior of all classes

   name, compilation, method storing, instance variables …

representation for classVariable names and shared pool variables (`addClassVarName:`, `addSharedPool:`, `initialize`)

`Class` inherits from `Object` because `Class` is an `Object`

   `Class` knows how to create instances, so all metaclasses should inherit ultimately from *`Class`*

RMod

Metaclasses in 7 points

1. Every object is an instance of a class
2. Every class eventually inherits from Object
3. Every class is an instance of a metaclass
4. The metaclass hierarchy parallels the class hierarchy
5. Every metaclass inherits from Class and Behavior
6. **Every metaclass is an instance of Metaclass**

RMod

6. Every metaclass is an instance of

Behaviour
ClassDescription
Class
Object class
Metaclass
Object
Square class
Square
Snake class
Snake
«instanceOf»
aSnake

RMod

Metaclass Responsibilities

Metaclass

Represents common metaclass Behavior

instance creation (subclassOf:)

creating initialized instances of the metaclass's sole instance

initialization of class variables

metaclass instance protocol
(name:inEnvironment:subclassOf:....)

method compilation (different semantics can be introduced)

class information (inheritance link, instance variable, ...)
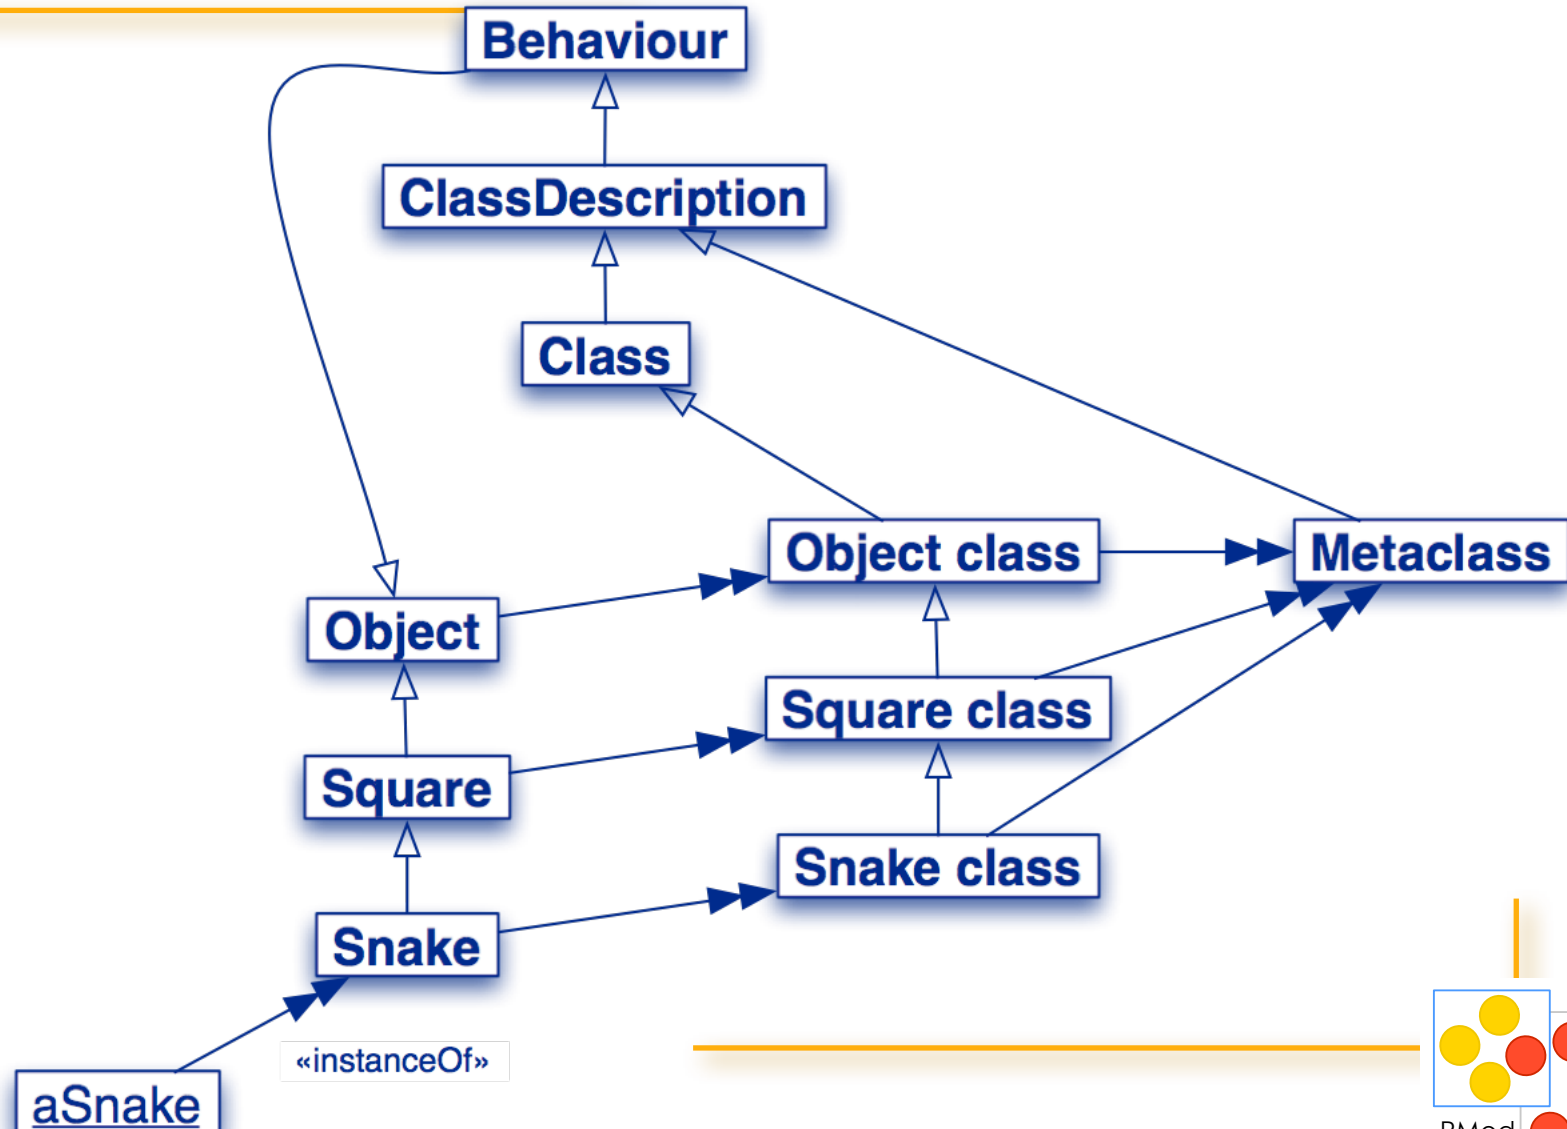
RMod

Metaclasses in 7 points

1. Every object is an instance of a class
2. Every class eventually inherits from Object
3. Every class is an instance of a metaclass
4. The metaclass hierarchy parallels the class hierarchy
5. Every metaclass inherits from Class and Behavior
6. Every metaclass is an instance of Metaclass
7. **The metaclass of Metaclass is an**

RMod

7. The metaclass of Metaclass is an instance

RMod
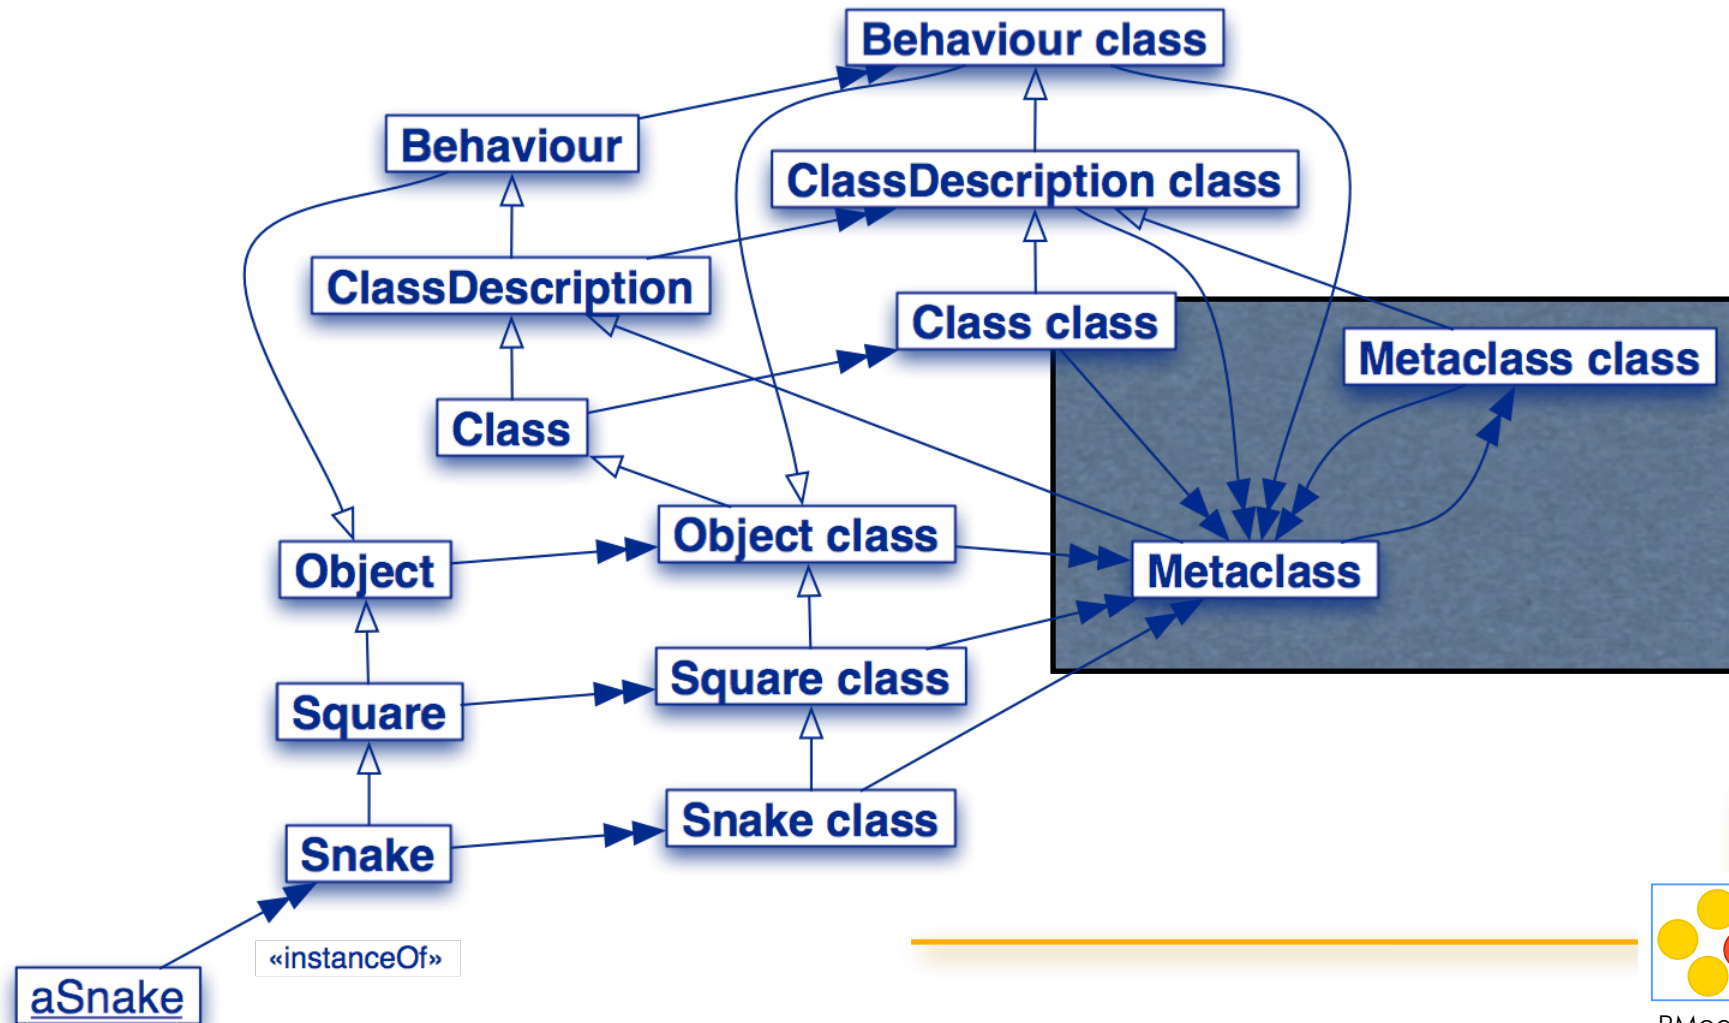
Navigating the metaclass hierarchy

```
MetaclassHierarchyTest>>testHierarchy
  "The class hierarchy"
  self assert: Snake superclass = Square.
  self assert: Square superclass = Object.
  self assert: Object superclass superclass = nil. "skip ProtoObject"
  "The parallel metaclass hierarchy"
  self assert: Snake class name = 'Snake class'.
  self assert: Snake class superclass = Square class.
  self assert: Square class superclass = Object class.
  self assert: Object class superclass superclass = Class.
  self assert: Class superclass = ClassDescription.
  self assert: ClassDescription superclass = Behavior.
  self assert: Behavior superclass = Object.
  "The Metaclass hierarchy"
  self assert: Snake class class = Metaclass.
  self assert: Square class class = Metaclass.
  self assert: Object class class = Metaclass.
  self assert: Class class class = Metaclass.
  self assert: ClassDescription class class = Metaclass.
  self assert: Behavior class class = Metaclass.
  self assert: Metaclass superclass = ClassDescription.
  "The fixpoint"
  self assert: Metaclass class class = Metaclass.
```

RMod